

FIG. 1

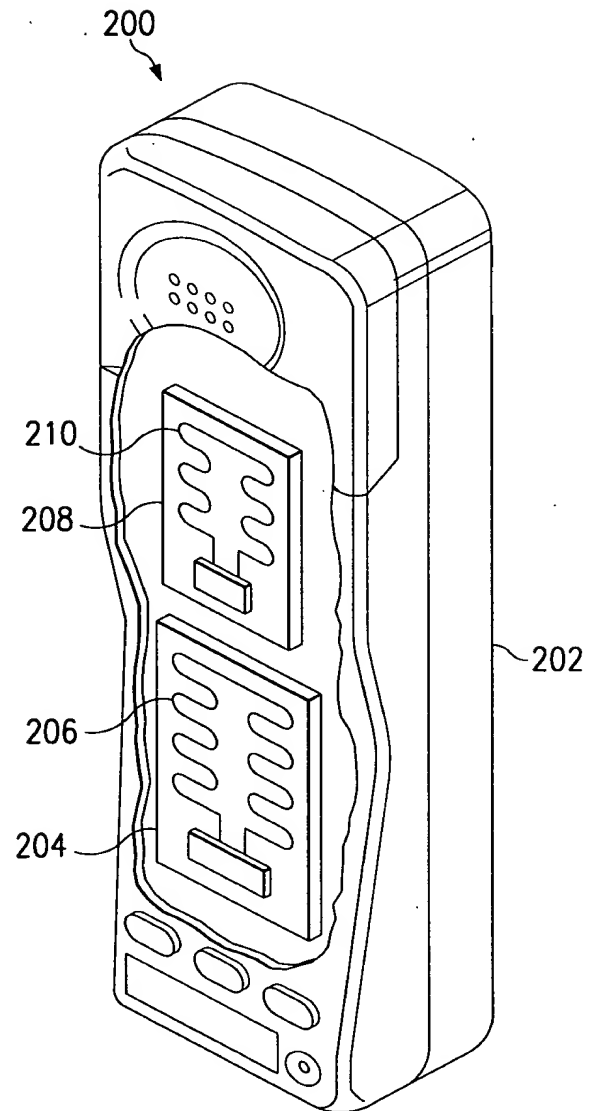


FIG. 2

FIG. 3

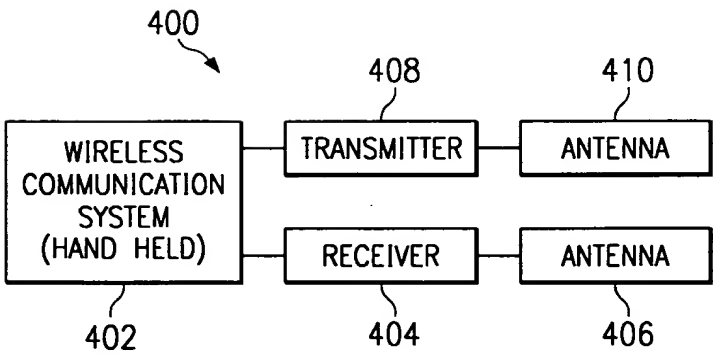
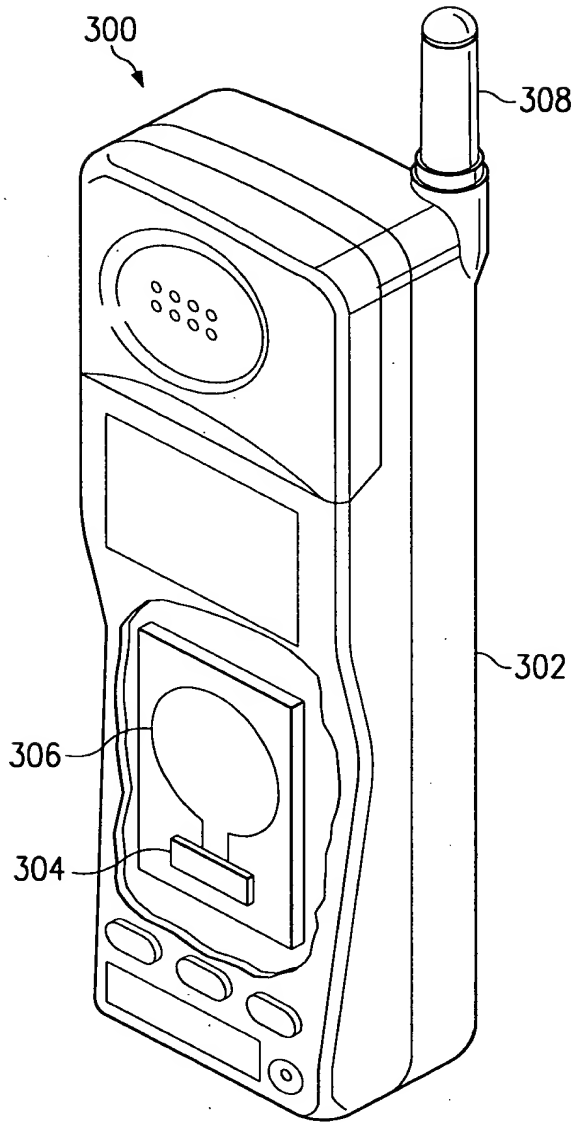


FIG. 4

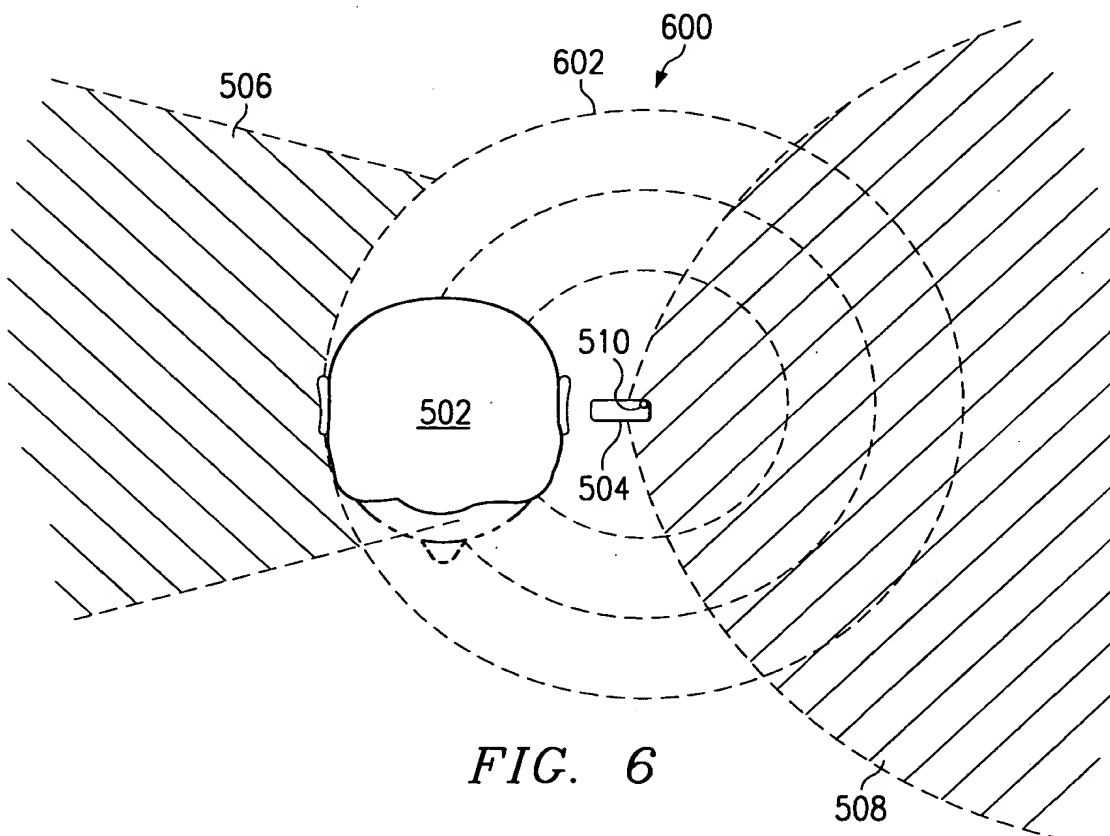
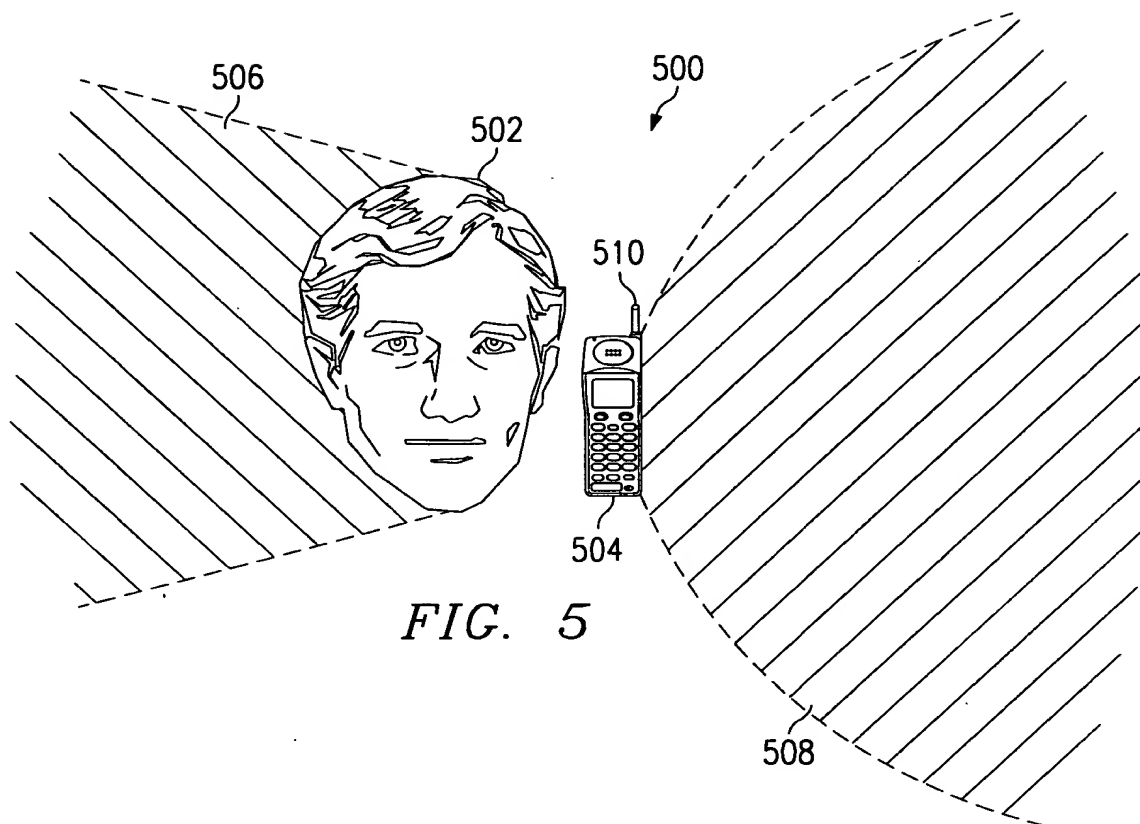


FIG. 7 is a schematic diagram of a system 700 for providing a user 720 with a visual indication of a location of a tower 710. The system 700 includes a tower 710, a user 720, and a visual indication 722. The tower 710 is shown as a lattice tower with a light source at the top. The user 720 is shown as a person with a head and shoulders. The visual indication 722 is shown as a dashed line with a star at the end, indicating the location of the tower 710. The system 700 is shown in a perspective view, with the tower 710 and the user 720 in the foreground and the visual indication 722 in the background. The system 700 is shown in a perspective view, with the tower 710 and the user 720 in the foreground and the visual indication 722 in the background.


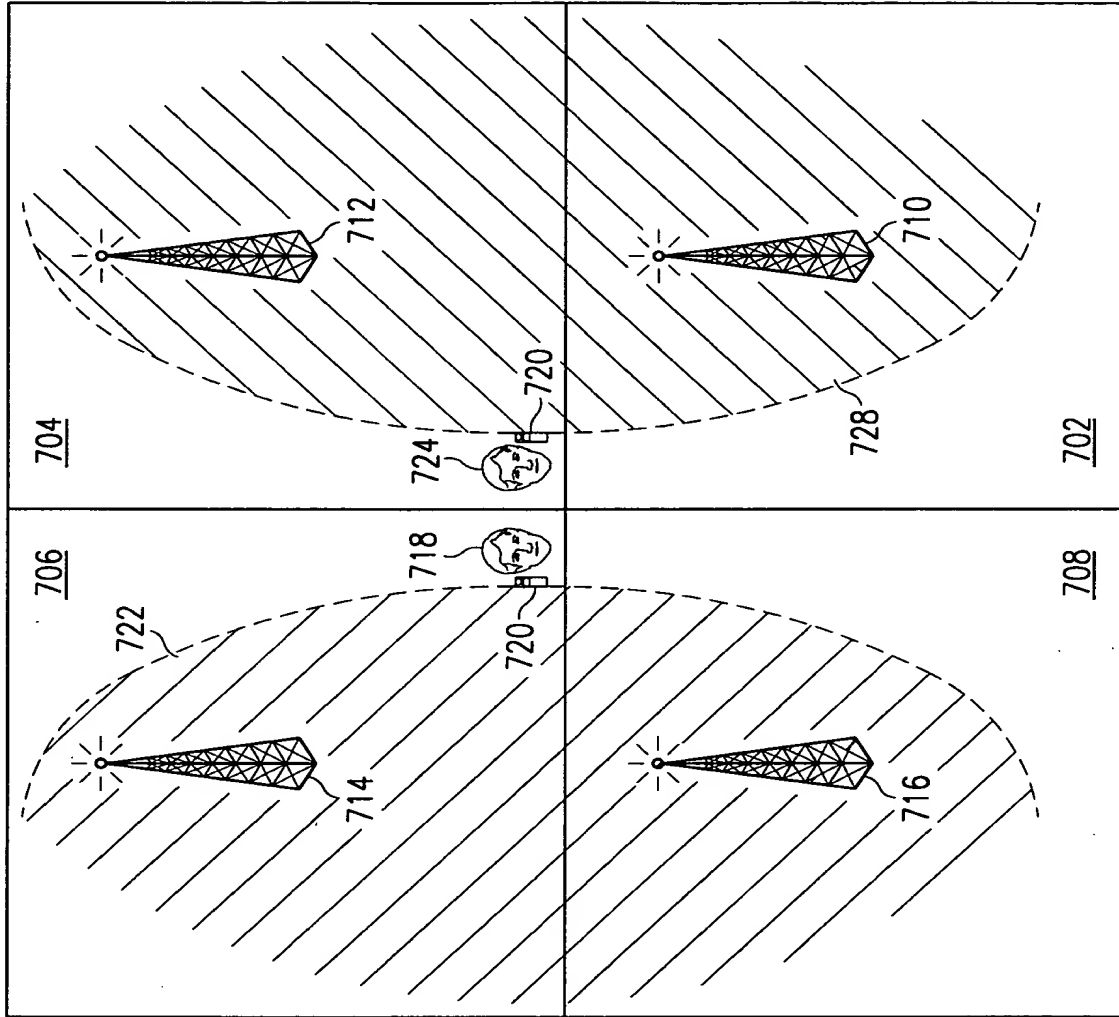


FIG. 7